


safety platforms ltd

20 Years of improving site safety



1. Versatile usage as **leaning, extension and stepladder.**
2. **Durable stiles** of high quality extruded profile.
3. **Comfortable, wide rungs** with 30 mm rung depth.
4. **Stable cross-beam** for high stability.
5. **High-strength restraining straps.**
6. **Rigid safety bar** against unintentional folding.
7. **Stairway mode possible**
(with up to 600 mm height nivellation).

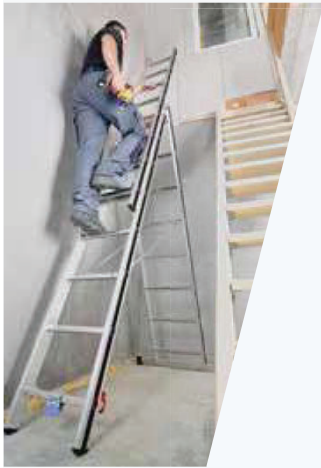

Number of rungs	3×6	3×8	3×10	3×12
Stile top/middle/bottom (approx. mm)	60/60/60	60/71/60	71/83/71	83/83/83
Number of rungs at max. extension	13	18	23	28
Length retracted/leaning ladder extended (approx. m)	1,75/3,71	2,32/5,11	2,88/6,52	3,49/7,97
Standing height step ladder extended/leaning ladder (approx. m)	1,48/2,60	2,29/3,96	3,34/5,34	4,13/6,71
Reach height step ladder extended/leaning ladder (approx. m)	3,48/4,60	4,29/5,96	5,34/7,34	6,13/8,71
Vertical height step ladder extended (approx. m)	2,50	3,49	4,52	5,37
Width extended top/middle/bottom (approx. mm)	350/415/770	350/415/994	350/415/1.134	350/415/1.200
Base width (approx. m)	1,29	1,61	1,95	2,37
Weight (approx. kg)	10,2	13,5	18,4	25,4
Order no.	7004718	7004724	7004730	700473699