


# safety platforms ltd

## 20 Years of improving site safety



1. **Torsionally rigid** due to the flanged stile/step connection.
2. **Extra reinforced stile** for high stability and long service life.
3. Steps flush with stile, **step backside rounded**.
4. **High-strength restraining straps** from size 7.
5. **Spacious, practical tool tray**.
6. **Stable bucket hook** with 10 kg load-bearing capacity.

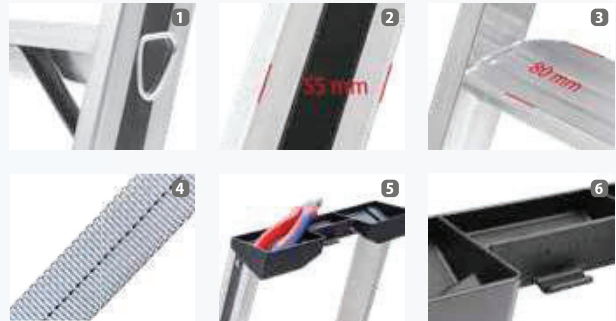

Number of steps incl. platform	3	4	5	6	7	8
Stile (approx. mm)	55	55	55	55	55	55
Length (approx. m)	1,39	1,64	1,89	2,14	2,38	2,63
Standing height (approx. m)	0,65	0,88	1,12	1,35	1,58	1,81
Reach height (approx. m)	2,65	2,88	3,12	3,35	3,58	3,81
Total vertical height (approx. m)	1,25	1,48	1,71	1,95	2,18	2,40
Width top/bottom (approx. mm)	280/415	280/440	280/465	280/495	280/520	280/545
Base width (approx. m)	0,70	0,85	1,00	1,15	1,30	1,50
Platform size (approx. m)	0,25×0,25	0,25×0,25	0,25×0,25	0,25×0,25	0,25×0,25	0,25×0,25
Weight (approx. kg)	3,8	4,5	5,3	6,1	6,9	7,6